



LU/518952
GB/03/2613



17 DEC 2004

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 21 AUG 2003

WIPO PCT


PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

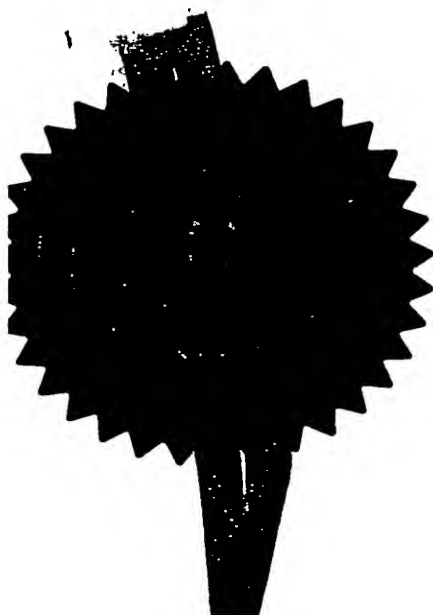

R. Mahoney

Signed

Dated 7 July 2003

BEST AVAILABLE COPY



18JUN02 E72514-7 000239
P01/7700 000-0213925.1

Request for grant of a patent
(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

118 JUN 2002

The Patent Office
Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

PC/GW/AB/P12042GB

2. Patent application number

(The Patent Office will fill in this part)

0213925.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

UNIVERSITY OF DUNDEE
NETHERGATE
PERTH ROAD
DUNDEE
DD1 4HN
UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

708 207004

4. Title of the invention

METALLISATION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

CRUIKSHANK & FAIRWEATHER
19 ROYAL EXCHANGE SQUARE
GLASGOW
G1 3AE
SCOTLAND
UNITED KINGDOM

Patents ADP number (if you know it)

547002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

32

Claim(s)

Abstract

Drawing(s)

14 + 14

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature *Cruikshank & Fairweather*
CRUIKSHANK & FAIRWEATHER

Date
17 JUNE 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

PAUL CHAPMAN

0141 221 5767

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

METALLISATION

Field of the Invention

This invention relates to photosensitive organometallic compounds which are used in the production of metal deposits. In particular, this invention relates to photosensitive organometallic compounds such as bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) (i.e. $(C_3F_7)_2PtC_8H_{12}$) which on exposure to UV radiation and then a reduction process forms a platinum metal deposit such as a substantially continuous thin 'sheet-like' film or a substantially narrow line which is capable of electrical conduction.

BACKGROUND OF THE INVENTION

Thin metal lines are required in integrated circuitry in, for example, opto-electronics, semiconductor technologies and electronic surgical implants.

For nanoscale circuits, conventional methods using metallic inks or mask and etch processes do not as yet possess the requirements which can ensure the deposition of accurate straight lines of high resolution, and the formation of perfect right angles rather than arcs during integrated circuit manufacture. Furthermore, if high resolution is not obtained high density interconnects cannot be manufactured.

It is an object of the present invention to obviate

and/or mitigate against this.

Summary of the Invention

According to a first aspect of the present invention there is provided a method for forming metal deposits on a substrate comprising:

- a) depositing a photosensitive organometallic compound onto a substrate;
- b) irradiating the photosensitive organometallic coated substrate with UV radiation;
- c) reducing the irradiated photosensitive organometallic coated substrate to form metal deposits adhered to the substrate; and
- d) removing any degraded photosensitive organometallic compound residue and unaffected photosensitive organometallic compound from said substrate.

Typically, the reduction process in step c) comprises:

- 1) a first heating and cooling stage;
- 2) a second heating and cooling stage in an oxidising atmosphere;
- 3) flowing an inert gas over the substrate; and
- 4) a third heating and cooling stage wherein a reducing gas flows over the substrate to form metal deposits.

The metal deposits may be of any shape or configuration such as a substantially continuous thin

'sheet-like' film or a substantially narrow line. By appropriate focussing of a UV beam, it is possible to create features with nanometre dimensions. Metal lines of less than 70 nm for example may be formed on the substrate.

5 Typically, the metal deposits are securely adhered to the substrate.

 The first heating and cooling stage may be in an inert atmosphere such as noble gas, e.g. dinitrogen.

10 Conveniently, the second heating and cooling stage is performed in a dioxygen containing atmosphere such as air.

 Typically, the reducing gas in the third heating and cooling stage comprises at least dihydrogen.

 Any unreacted photosensitive organometallic compound may be removed via a sublimation step or a washing step.

15 The photosensitive organometallic compounds of the present invention are compounds which, upon exposure to UV irradiation and subsequent reduction are converted to metals.

20 Typically, the photosensitive organometallic compound is a platinum organometallic.

 Alternatively, the photosensitive organometallic compound contains any of the following metals: palladium, copper, rhodium, tungsten, iridium, silver, gold and tantalum.

25 Typically, the photosensitive organometallic compounds are the compounds of formula (I) as described below.

 In particular, the photosensitive organometallic

compounds are selected from any of the following: bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II); bis-(perfluoropropyl)-1-methyl-1,5-cyclooctadiene platinum (II); and bis-(perfluoropropyl)-1-fluoromethyl-1,5-cyclooctadiene platinum (II).

The organometallic compound may be deposited using for example any of the following: a vacuum coating technique, a spinning technique, a surface tension coating technique or a hot spray technique.

Conveniently, a thin film of about 10mg to 500mg of organometallic is deposited onto a substrate.

A thin film of about 100mg of photosensitive organometallic may be deposited onto a substrate.

Typically, the UV radiation has a wavelength of about 150-400nm.

Preferably, the UV radiation has a wavelength of about 260nm.

Conveniently, a dose of about $10-500\text{Jcm}^{-2}$ of UV radiation is irradiated onto the substrate.

Preferably, a dose of about 100Jcm^{-2} of UV radiation is irradiated onto the substrate.

Conveniently, a UV mask is used to form a specific pattern of metal deposit.

Alternatively, the metal deposits are formed directly with a UV beam in a "direct writing" technique.

Typically, the reduction process comprises:

(1) heating the coated substrate from about 25°C to

about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 80°C for about 60 minutes; and then cooling the substrate from about 80°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute;

(2) heating the substrate from about 25°C to about 250°C at a ramp rate of about 5°C per minute; maintaining the temperature at about 250°C for about 60 minutes; and then cooling the substrate from about 250°C to about 25°C at a ramp rate of about 5°C per minute; wherein the coated substrate is exposed to air;

(3) flowing N₂ at about 25°C over the coated substrate for about 10 minutes; and

(4) heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed over the coated substrate at a rate of about 150ml per minute.

Alternatively, the reduction process comprises:

(1) heating the coated substrate from about 25°C to

about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 80°C for about 60 minutes; and then cooling the substrate from about 80°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute;

(2) heating the substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a ramp rate of about 20°C per minute; wherein the coated substrate is exposed to air;

(3) flowing N₂ at about 25°C over the coated substrate for about 10 minutes; and

(4) heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed over the coated substrate at a rate of about 150ml per minute.

According to a second aspect of the present invention there is provided metal deposits formed according to the

first aspect.

The metal deposits may be of any shape or configuration such as a substantially continuous thin 'sheet-like' film or a substantially narrow line.

5 Typically, the metal deposits are securely adhered to the substrate.

The metal deposits may be platinum.

10 Alternatively, the metal deposits are selected from any of the following: palladium, copper, rhodium, tungsten, iridium, silver, gold and tantalum.

Preferably, the metal deposits are uniform and continuous.


Typically, the metal deposits may have a width of 60nm to 20nm.

15 Conveniently, the metal deposits may have a thickness of 5nm to 20nm.

By masking parts of a substrate metal deposits in predetermined patterns may be obtained.

20 Typically, the metal deposits have good conducting properties.

According to a third aspect of the present invention there is provided compounds according to the following formula (I):

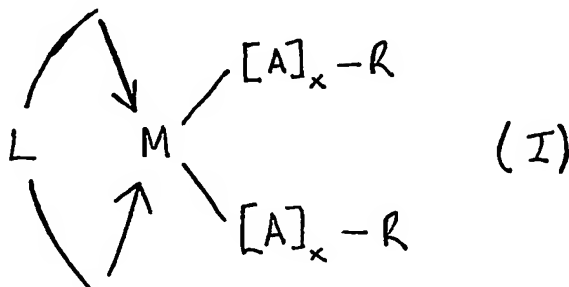

wherein:

M is any of platinum, palladium, copper, rhodium, tungsten, iridium, silver, gold and tantalum;

A is any of oxygen, sulphur, an amide grouping, an amine grouping or an ester grouping;

x is 0 or 1;

R is a fluoroorgano group; and

L is a bidentate ligand.

Typically, A is oxygen.

Typically, x is 0.

The fluoroorgano group may be selected from any fluoro derivatives of the following: a C₁₋₁₂ alkyl, a C₁₋₁₂ alkenyl, a C₁₋₁₂ alkynyl or a C₁₋₁₂ aryl grouping which may be substituted or unsubstituted and/or linear or branched.

The fluoroorgano group may be selected from any fluoro derivatives of the following: a C₁₋₄ alkyl, a C₁₋₄ alkenyl, a C₁₋₄ alkynyl or a C₁₋₄ aryl grouping which may be substituted or unsubstituted or linear or branched.

Typically, the fluoroorgano group may be selected from any fluoro derivatives of the following: methyl, ethyl, n-propyl, iso-propyl, n-butyl, iso-butyl or tert-butyl.

Conveniently, the fluoroorgano group may be a perfluoroorgano group.

The bidentate ligand may be cyclic or non-cyclic.

The bidentate ligand may comprise for example two olefin groups, and as such may be 1,5-cyclooctadiene or derivatives of thereof such as 1-methyl-1,5-cyclooctadiene

and 1-fluoromethyl-1,5-cyclooctadiene.


Alternatively, the bidentate ligand may be cyclooctatetraene or derivatives thereof.

Typically, the compound shown by formula (I) may be a
5 bis-substituted (perfluoroorgano) cyclooctadiene
platinum(II) compound.

Conveniently, the compound shown by formula (I) may be
selected from any of the following: bis-(perfluoropropyl)-
1,5-cyclooctadiene platinum (II); bis-(perfluoropropyl)-1-
10 methyl-1,5-cyclooctadiene platinum (II); and bis-
(perfluoropropyl)-1-fluoromethyl-1,5-cyclooctadiene
platinum (II).

According to a fourth aspect of the present invention
there is provided a process for forming compounds according
15 to the first aspect defined by formula (I) comprising
forming a reaction mixture of:

- a) compounds according to formula (II) as shown
below:

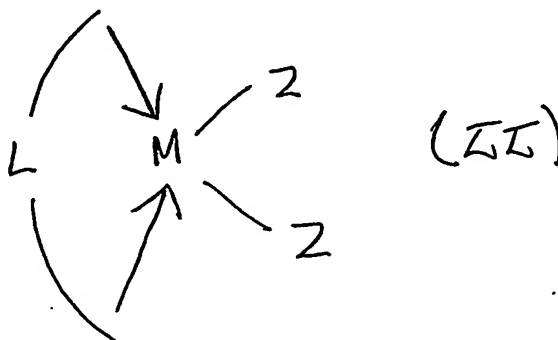

20 wherein:

M is any of platinum, palladium, copper, rhodium,

tungsten, iridium, silver, gold and tantalum;

L is a bidentate ligand; and

Z is an organo grouping;

and

- 5 b) compounds defined as follows according to
 formula (III):



wherein:

10 h is a halide;

A is any of oxygen, sulphur, an amide grouping, an
amine grouping or an ester grouping;

x is 0 or 1; and

R is a fluoroorgano grouping;

15 and subjecting the reaction mixture to conditions such
that compounds according to formula (I) are formed.

The mixing of the reaction mixture may be performed
under darkness or in ambient conditions.

20 The compound shown by formula (II) may be in a
solvent.

Typically, the compound shown by formula (II) in the
solvent is added to the compound shown by formula (III).

Conveniently, the compound shown by formula (I) is
obtained by filtering off the precipitate and evaporating
25 off any remaining solvent or any other volatile substances.

The obtained precipitate may be purified using

recrystallisation and/or a chromatographic technique.

The obtained precipitate may be purified by redissolving the obtained precipitate in a solvent and running the obtained solution down a chromatographic column and collecting the fraction containing the purified compound of formula (I) and then crystallising the collected fraction from, for example, a solution of methylene chloride/pentane solution.

The solvent used to dissolve the compound shown by formula (II) may be an organic solvent such as an aromatic or aliphatic hydrocarbon or the like. In particular, the organic solvent may be methylene chloride or chloroform.

The compound shown by formula (III) may be selected from any of the following: perfluoroorgano-iodide, perfluoroorgano-bromide, perfluoroorgano-chloride and perfluoroorgano-fluoride.

The organo group of the fluoroorgano group in formula (II) or formula (III) may be selected from any of the following: a C_{1-12} alkyl, a C_{1-12} alkenyl, a C_{1-12} alkynyl or a C_{1-12} aryl grouping which may be substituted or unsubstituted and/or linear or branched.

The organo group of the group in formula (II) or formula (III) may be selected from any of the following: a C_{1-4} alkyl, a C_{1-4} alkenyl, a C_{1-4} alkynyl or a C_{1-4} aryl grouping which may be substituted or unsubstituted or linear or branched.

The organo group of the fluoroorgano group in formula

(II) or formula (III) may be selected from any combinations of the following: methyl, ethyl, n-propyl, iso-propyl, n-butyl, iso-butyl, tert-butyl, cyclopentyl or cyclohexyl.

5 The compound shown by formula (III) may be selected from any of the following: n-perfluoropropyl iodide; a perfluorobutyl iodide or the like.

Typically, the mixing of the reaction mixture takes place under an inert atmosphere and comprises shaking for five days.

10 Conveniently, the inert atmosphere is selected from any of the noble gases or nitrogen.

Typically, the compound shown by formula (II) is a bis-substituted organo platinum(II) cyclooctadiene compound.

15 Conveniently, the compound formed according to formula (I) is selected from any of the following: bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II); bis(perfluoropropyl)-1-methyl-1,5-cyclooctadiene platinum (II); and bis-(perfluoropropyl)-1-fluoromethyl-1,5-
20 cyclooctadiene platinum (II).

Brief Description of the Drawings

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

25 Figure 1 is a representation of the film obtained on depositing dimethyl-platinum cyclooctadiene onto a glass

substrate and subjecting the deposited film to UV radiation according to a first embodiment of the present invention;

Figure 2 is a thermal gravimetric analysis of dimethyl-platinum cyclooctadiene;

5 Figure 3 is a representation of a platinum metal film obtained on reducing a first dimethyl-platinum cyclooctadiene coated substrate according to a first embodiment of the present invention;

10 Figure 4 is a representation of a platinum metal film obtained on reducing a second dimethyl-platinum cyclooctadiene coated substrate according to a first embodiment of the present invention;

15 Figure 5 is the result of measuring the thickness of 100mg of deposited bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) onto a glass substrate according to a second embodiment of the present invention;

Figure 6 is a thermal gravimetric analysis of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II);

20 Figure 7 is the result of measuring the thickness of film formed on exposing 100mg of deposited bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) to UV radiation according to a second embodiment of the present invention;

25 Figure 8 is a representation of a platinum metal film obtained on reducing 100mg of deposited bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) according to a second embodiment of the present invention;

Figure 9 is the result of measuring the thickness of the platinum metal film formed in Figure 8;

Figure 10 is a representation of a further platinum metal film formed obtained using a bis-(perfluoropropyl)-
5 1,5-cyclooctadiene platinum (II) in a different reduction process according to a third embodiment of the present invention;

Figure 11 is a representation of a platinum metal film formed comprising a 60 μ m track according to a fourth
10 embodiment of the present invention;

Figure 12 is a representation of a platinum metal film formed comprising a 1mm² pad of platinum metal formed according to a fifth embodiment of the present invention;

Figure 13 is a representation of the film obtained on
15 depositing 150mg bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) onto a substrate according to a sixth embodiment of the present invention;

Figure 14 is the result of measuring the thickness of the deposited bis-(perfluoropropyl)-1,5-cyclooctadiene
20 platinum (II) shown in Figure 13;

Figure 15 is a representation of the film after masking the left-hand side of the film shown in Figure 14 and irradiating the coated substrate with UV radiation;

Figure 16 is a representation of a substrate coated
25 with bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) as shown in Figure 14 after a first reduction stage;

Figure 17 is a representation of a substrate coated

with bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) as shown in Figure 14 after a second reduction stage;





Figure 18 is a representation of a substrate coated with bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) as shown in Figure 14 after a fourth reduction stage; and

Figure 19 is the result of measuring the thickness of the deposited platinum metal formed from the coated substrate shown in Figure 14 after performing the four reduction stages.

Detailed Description of the Invention

The present invention relates to the use of photosensitive organometallic compounds in forming metal and, in particular, platinum metal deposits such as films and narrow lines via a reduction process. Organometallic compounds such as any of the following are suitable: bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II); dimethyl-platinum cyclooctadiene; bis-(perfluoropropyl)-1-methyl-1,5-cyclooctadiene platinum (II); and bis-(perfluoropropyl)-1-fluoromethyl-1,5-cyclooctadiene platinum (II).

The structures of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II); dimethyl-platinum cyclooctadiene; bis-(perfluoropropyl)-1-methyl-1,5-cyclooctadiene platinum (II); and bis-(perfluoropropyl)-1-fluoromethyl-1,5 cyclooctadiene platinum (II) are shown below:

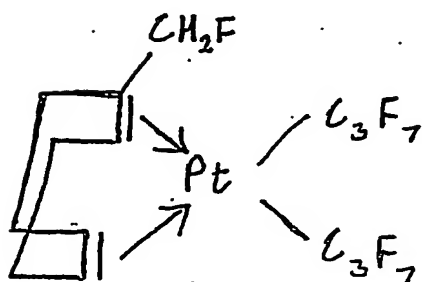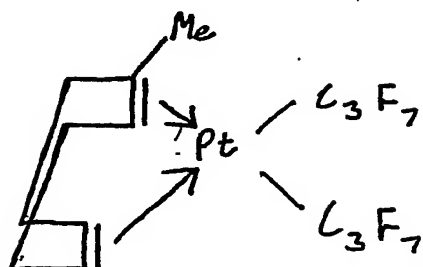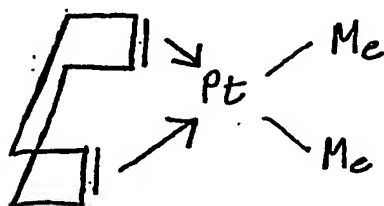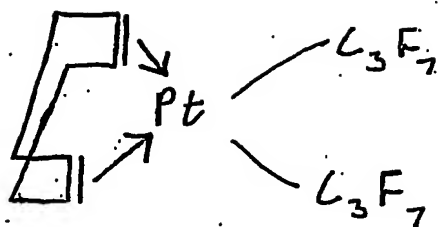

The organometallic compounds are first of all deposited onto a glass substrate via any suitable deposition technique. Usually a vacuum coating technique is used. The organometallic platinum compounds are then exposed to UV radiation, utilising a photomask if appropriate, and then reduced to, for example, platinum metal via, a 4-stage reduction process.

The 4-stage reduction process first of all involves a heating and cooling stage in an atmosphere such as an inert atmosphere (e.g. N_2) which dries the organometallic compound. There is then a further heating and cooling stage in an oxidising atmosphere (e.g. air) which acts to remove intercalated carbon moieties from the metallic feature. An inert gas, such as N_2 is then blown over the coated substrate. There is then a further heating and cooling step in a reducing atmosphere (e.g. H_2) wherein the oxidised metallic component is reduced to a metal. This process is found to reduce, for example, the organometallic platinum compound to platinum metal which forms, for example, a film which is continuous and uniform.

The substrates coated with organometallic compound may be masked so as to produce specific patterns of, for example, platinum metal.

It has been found that the novel compound bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) provides good platinum films. This is discussed in more detail below.

Examples

Example 1

First of all, glass substrates of Corning 7059 glass were cleaned according to the following process:

- 5 a. Pre-cut substrates of 1 cm² were added to Desolvit 3000 (a commercial cleaning material) and exposed to ultrasonic agitation for 30 minutes.
- 10 b. The substrates were then rinsed in warm deionised water (approximately 40°C) for 10 minutes.
- 15 c. The substrates were then briefly rinsed in deionised water.
- 15 d. Finally, blown nitrogen was used to dry the substrates.

100mg of dimethyl-platinum cyclooctadiene was weighed out using a balance (a Mettler Toledo AB54-S) and added to a molybdenum covered boat. The substrates were then coated to a glass slide which was attached by iridium wire before
20 being attached to a 'rotatilt table'.

The dimethyl-platinum cyclooctadiene was then deposited via evaporation onto a glass substrate. The evaporation procedure comprises placing the boat and the cleaned substrate in a vacuum coating unit. A bell jar and
25 guard were then positioned, liquid nitrogen added to the

trap and the chamber evacuated to 8×10^{-6} mb. A current was then passed through the boat and slowly increased until the pressure in the chamber increased. The current was then held until the pressure started to decrease. This reduction in pressure indicated that the evaporation was complete. The chamber was then vented and the coated substrate removed.

The coated substrate was then irradiated with UV radiation at a wavelength of 260nm. An OAI J500/VIS mask aligner was used to provide a total dose of 108.9 Jcm^{-2} from a bulb with a power output of $16.5 \text{ mJs}^{-1} \text{ cm}^{-2}$.

Figure 1 which is a representation of the deposited dimethyl-platinum cyclooctadiene after exposure to UV radiation shows that the obtained film quality is poor and appears largely crystalline.

The dimethyl-platinum cyclooctadiene coated glass substrate was then reduced to platinum metal using a new 4-stage dry reduction process.

Referring to the thermal gravimetric analysis shown in Figure 2, dimethyl-platinum cyclooctadiene is shown to start to sublime at a temperature of approximately 110°C , which is the isothermal temperature for Stage 1 in the 4-stage reduction process shown below. The 4-stage reduction process is performed as follows:

Stage 1: heating the coated substrate from about 25°C to about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 120°C for about 60

minutes; and then cooling the substrate from about 120°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute;

5 Stage 2: heating the substrate from about 25°C to about 250°C at a ramp rate of about 5°C per minute; maintaining the temperature at about 250°C for about 60 minutes; and then cooling the substrate from about 250°C to about 25°C at a ramp rate of about 5°C per
10 minute; wherein the coated substrate is exposed to air;

Stage 3: flowing N₂ at about 25°C over the coated substrate for about 10 minutes; and

15 Stage 4: heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed
20 over the coated substrate at a rate of about 150ml per minute.

Figures 3 and 4 are representations of the platinum metal film obtained. However, the quality and adhesion of the platinum film is rather poor with the end product
25 failing the Scotch Tape Test. On analysing Figures 3 and 4 it is clear from the discontinuous pattern, that a uniform continuous film is not produced. Moreover, in Figure 4 it

appears that the platinum metal has, in fact, curled up.

Using a 4-point-probe the resistance of one of the platinum films was measured. A number of results were taken, and averaged, as follows:

5

$$R_1 = 1299.6 \, \Omega$$

$$R_2 = 2209.6 \, \Omega$$

$$R_3 = 7512.2 \, \Omega$$

$$R_{av} = (R_1 + R_2 + R_3) / 3$$

10

$$= (1299.6 + 2209.6 + 7512.2) / 3$$

$$= 3673.8 \, \Omega$$

15 An average resistance value of 3673.8 Ω was therefore obtained. The resistance value of 3673.8 Ω is very high and shows that the platinum metal film produced is either contaminated with impurities and/or is extremely thin in places. The latter seems likely as both Figures 3 and 4 show areas where there appears to be only a flash coating of platinum metal deposited. These areas are all interlinked and appear around the thicker metal regions thus creating a 'paving stone' effect.

20

In summary, the platinum metal produced from the reduction of deposited dimethyl-platinum cyclooctadiene does not produce a continuous Pt metal film and has extremely poor adhesion to the glass substrate.

Example 2

Bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) was then used to coat a glass substrate.

5 Bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) was prepared as follows. A solution of bis-methyl platinum (II) cyclooctadiene (2.6g) was dissolved in 3cm³ of dry, methylene chloride (i.e. dichloromethane) to which 2.4cm³ of n-perfluoropropyl iodide was slowly added under an inert atmosphere of argon. The reaction was shaken for 5 days in
10 ambient conditions under an argon atmosphere, during which time a yellow/cream precipitate formed. The reaction mixture was filtered off and the solvent removed by evaporation resulting in a yellow product. A solution of the product in methylene chloride was then filtered through
15 a short fluorosil column. The fractions containing the desired product were combined and a creamy white product crystallised out in a methylene chloride/pentane solution. A 20.5% yield of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) was obtained.

20 A glass substrate was then cleaned and coated as before using 100mg of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II). As shown in Figure 5, the coating was measured to be about 1260nm thick.

25 The thermal gravimetric analysis of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) is shown in Figure 6. It is clear from the thermal gravimetric analysis that the bis-(perfluoropropyl)-1,5-cyclooctadiene

platinum (II) sublimes and does not decompose.

The bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) coated glass substrate was then exposed to UV radiation of 260nm (as described in Example 1).

5 It was observed that the film on the glass substrate experienced shrinkage during the UV exposure. The surface profile in Figure 7 shows that the film thickness was reduced by approximately 40 percent to a thickness of 750nm on exposure to UV radiation.

10 Once again a 4-stage reduction process was used to metalise the film as follows:

Stage 1: heating the coated substrate from about 25°C to about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 120°C for about 60 minutes; and then cooling the substrate from about 15 120°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute. This stage results in sublimation of any non-exposed area;

20 Stage 2: heating the substrate from about 25°C to about 350°C at a ramp rate of about 5°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a ramp rate of about 5°C per minute; wherein the coated substrate is exposed to 25 air. This stage is a metallisation step;

Stage 3: flowing N₂ at about 25°C over the coated

substrate for about 10 minutes; and

Stage 4: heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed over the coated substrate at a rate of about 150ml per minute.

Following the 4-stage reduction process a sheet metal platinum metal film was obtained. The sheet metal platinum film is shown in Figure 8. The black line is a scratch that was made following the evaporation of the film to allow the film thickness to be measured.

The thickness of this film was found to be 7.8nm as shown in Figure 9. The resistivity is calculated as follows:

$$\rho = (\pi t / \ln 2) \times (V/I)$$

where: $(V/I) = R$

ρ = resistivity of film (Ωm)

$(\pi / \ln 2) = 4.532$

t = film thickness (m)

R = resistance of film (Ω)

Five resistance measurements were taken from the sample at

various places, the average of which was used to calculate the resistivity:

$$R_1 = 12.1870 \, \Omega$$

$$R_2 = 14.2604 \, \Omega$$

5 $R_3 = 10.9215 \, \Omega$

$$R_4 = 14.5243 \, \Omega$$

$$R_5 = 11.4818 \, \Omega$$

$$\begin{aligned} R_{av} &= (R_1 + R_2 + R_3 + R_4 + R_5) / 5 \\ &= 12.675 \, \Omega \end{aligned}$$

10 The deposited sheet metal platinum film therefore has an average resistance of 12.675 Ω .

The resistivity is therefore calculated as follows:

$$\rho = [4.532 \times (7.8 \times 10^{-9}) \times 12.675] \, \Omega\text{m}$$

15 $= 44.81 \times 10^{-8} \, \Omega\text{m}$

The resistivity of the deposited platinum film is thus $44.81 \times 10^{-8} \, \Omega\text{m}$.

20 The sheet resistance of the film is calculated as follows:

$$R_s = \rho / t$$

where: R_s = sheet resistance of film (Ω^{-1})

ρ = resistivity of film (Ωm)

t = thickness of film (m)

$$R_s = 44.81 \times 10^{-8} / 7.8 \times 10^{-9}$$

$$R_s = 57.45 \Omega^{-1}$$

5 The sheet resistance of the deposited platinum film is therefore 57.45 Ω^{-1} .

10 The bulk value of resistivity for platinum at room temperature is $10.7 \times 10^{-8} \Omega\text{m}$; so the calculated value is approximately 4 times the bulk value. This can be explained due to electron scattering from grain boundaries, the metal surface and the substrate. A bulk value for resistivity is not expected where measuring such a thin film.

15 The calculated value for resistivity shows that the process produced platinum metal with a high purity, and a uniform and continuous coverage with a thickness of about 7.8nm.

Example 3

20 A glass substrate was cleaned as before and 100mg of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) was deposited onto the substrate.

 The coated glass substrate was exposed to UV radiation as before.

25 The following 4-stage reduction process was then used to reduce the deposited bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) to platinum:

Stage 1: heating the coated substrate from about 25°C to about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 80°C for about 60 minutes; and then cooling the substrate from about 80°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute. This stage results in sublimation of any non-exposed area;

Stage 2: heating the substrate from about 25°C to about 250°C at a ramp rate of about 5°C per minute; maintaining the temperature at about 250°C for about 60 minutes; and then cooling the substrate from about 250°C to about 25°C at a ramp rate of about 5°C per minute; wherein the coated substrate is exposed to air. This is a metallisation step;

Stage 3: flowing N₂ at about 25°C over the coated substrate for about 10 minutes; and

Stage 4: heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed over the coated substrate at a rate of about 150ml per minute.

The 4-stage process listed above is the same as that in Example 2 apart from Stage 2, which has a reduced

isothermal temperature of 250°C and a reduced ramp rate of 5°C per minute.

Figure 10 is a representation of the platinum metal film produced. It is clear that the produced platinum film is of a continuous and uniform nature. It was not possible to measure the thickness of the platinum metal film as the substrate was completely covered.

For comparison purposes, the resistance of the film was measured after Stages 2 and 4 of the metallisation process using the 4-point-probe. This experiment showed that Stage 4 of the metallisation process is a necessary step as a marked reduction in resistance was measured on completion of this stage. The resistance of the film after Stages 2 and 4 was approximately 72 Ω and 5 Ω , respectively.

The process of Stage 4 is believed to firstly, remove any surface oxygen from the metal and secondly, homogenise the metal nanoeryotallites. Both of these effects reduce the resistance and hence the resistivity of the metal.

To improve the resolution of formed platinum, the substrate may be partly taped (i.e. masked). Figure 11 represents a 60 μm track formed on the substrate. Figure 12 represents a 1 mm^2 pad of formed platinum metal.

Example 4

As 100mg of bis-(perfluoropropyl)-1,5-cyclooctadiene platinum (II) produced about a 750nm thick film (Example 2)

it was assumed that 150mg of bis-(perfluoro)-1,5-cyclooctadiene platinum (II) would produce a film of approximately 1200nm thick.

As previously described 150mg of bis-(perfluoro)-1,5-cyclooctadiene platinum (II) was evaporated onto a 1cm² glass substrate and subjected to UV radiation. The evaporated film is shown in Figure 13. As shown in Figure 14 a film thickness of approximately 1300nm was obtained which was therefore in line with the assumption.

A further similarly prepared, bis-(perfluoro)-1,5-cyclooctadiene platinum (II) coated glass substrate was then partly masked, on the right-hand side, with a thin piece of metal and then exposed to UV radiation as before. Figure 15 is a representation of the glass substrate after exposure to UV radiation wherein on the left-hand side of the substrate platinum metal is to be formed.

A 4-stage reduction was then performed as follows:

Stage 1: heating the coated substrate from about 25°C to about 120°C at a ramp rate of about 2°C per minute; maintaining the temperature at about 120°C for about 60 minutes; and then cooling the substrate from about 120°C to about 25°C at a ramp rate of about 10°C per minute; wherein N₂ is flowed over the coated substrate at a rate of about 50ml per minute;

Stage 2: heating the substrate from about 25°C to about 250°C at a ramp rate of about 5°C per minute; maintaining the temperature at about 250°C for about 60

minutes; and then cooling the substrate from about 250°C to about 25°C at a ramp rate of about 5°C per minute; wherein the coated substrate is exposed to air;

5 Stage 3: flowing N₂ at about 25°C over the coated substrate for about 10 minutes; and

Stage 4: heating the coated substrate from about 25°C to about 350°C at a ramp rate of about 20°C per minute; maintaining the temperature at about 350°C for about 60
10 minutes; and then cooling the substrate from about 350°C to about 25°C at a rate of about 20°C per minute; wherein a mixture of about 5% H₂ and 95% N₂ is flowed over the coated substrate at a rate of about 150ml per minute. This final stage results in formation and
15 densification of Platinum metal.

Pictures were taken after the first, second and fourth stages in the reduction process and are shown in Figures 16, 17 and 18, respectively.

The resistance of the film on the substrate was
20 measured using the 4-point-probe after Stages 2 and 4 of the metallisation process. The resistance was found to be 12 Ω and 4.4 Ω, respectively. It is therefore obvious that Stage 4 of the process is essential in the process. The thickness of the platinum metal film was found to be
25 approximately 16nm, as shown in Figure 19. This resistance along with the thickness of the metal film allowed the

resistivity and sheet resistance values to be calculated as follows:

$$\rho = (\pi t / \ln 2) \times (V/I)$$

where: $(V/I) = R$

5 ρ = resistivity of film (Ωm)

$$(\pi / \ln 2) = 4.532$$

t = film thickness (m)

R = resistance of film (Ω)

The film thickness was measured to be approximately 16nm.

10 $\rho = 4.532 \times (16 \times 10^{-9}) \times 4.4$
 $= 31.91 \times 10^{-8} \Omega\text{m}$

The resistivity of the film is therefore $31.91 \times 10^{-8} \Omega\text{m}$.

The sheet resistance is calculated as follows:

$$R_s = \rho / t$$

15 where: R_s = sheet resistance of film (Ω^{-1})

ρ = resistivity of film (Ωm)

t = thickness of film (m)

$$R_s = 31.91 \times 10^8 / 16 \times 10^{-9}$$
$$= 19.94 \Omega^{-1}$$

The sheet resistance of the film is therefore $19.94 \Omega^{-1}$. The obtained value of resistivity is approximately 3 times that of the bulk resistivity value for platinum (i.e $10.7 \times 10^{-8} \Omega m$) and is an improvement on the resistivity obtained in Example 2. The reason for this improvement is that electron scattering effects are less predominant as the film thickness increases.

1/14

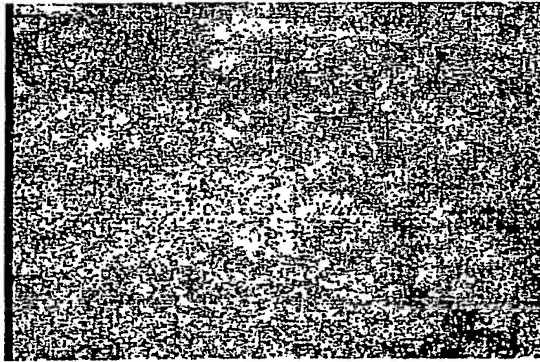


Fig. 1

2/14

TGA of Dimethyl-Pt-COD complex.

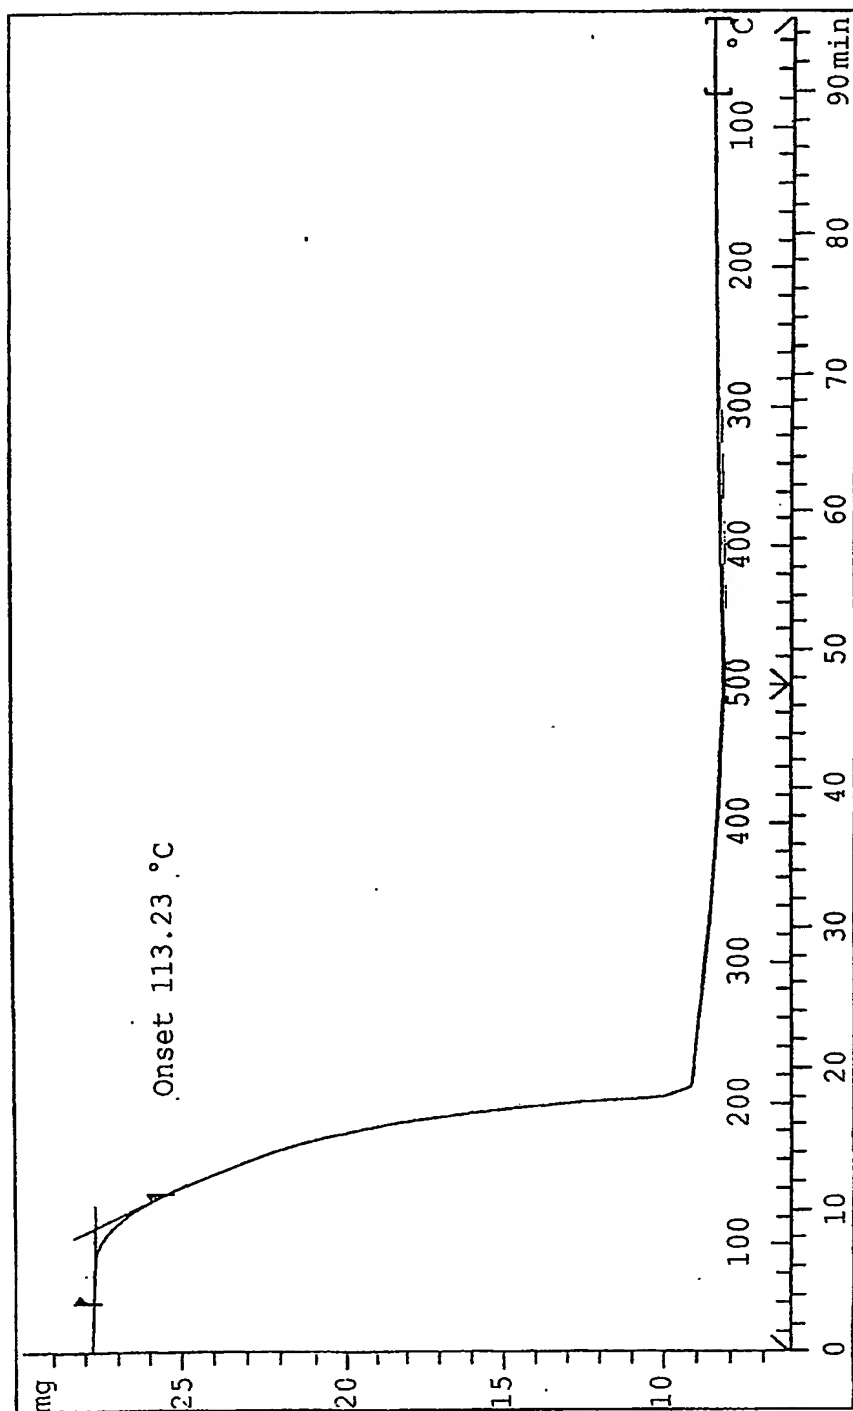


Fig. 2

3/14




Fig. 3




Fig. 4

4/14

Fig.5

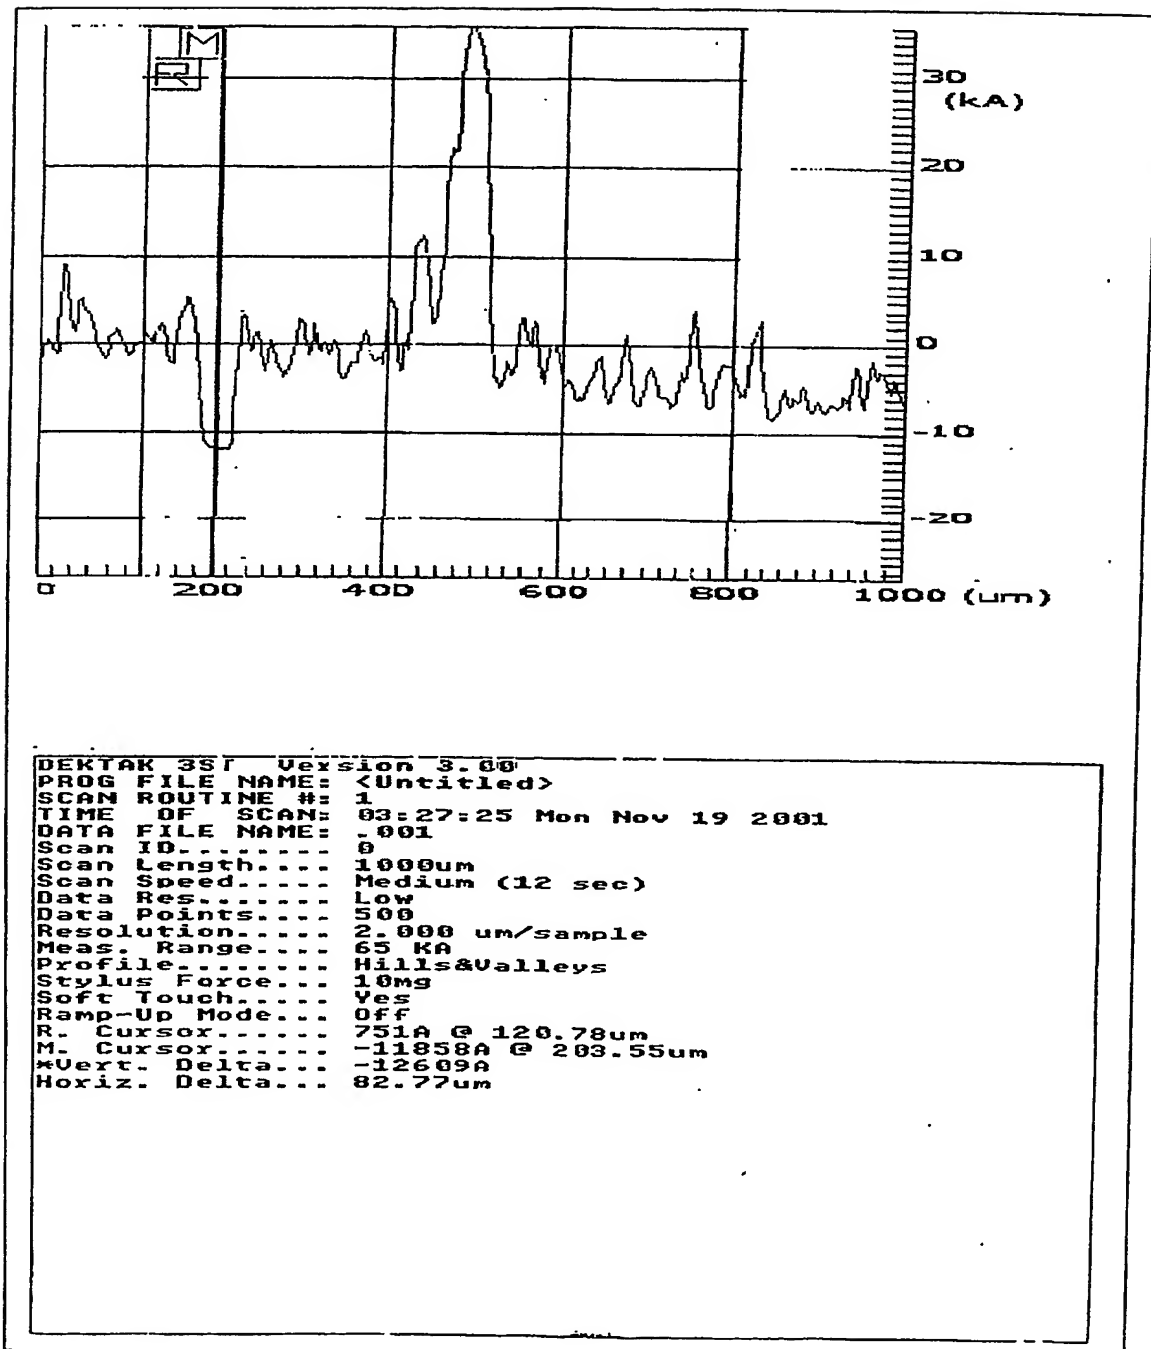


5/14

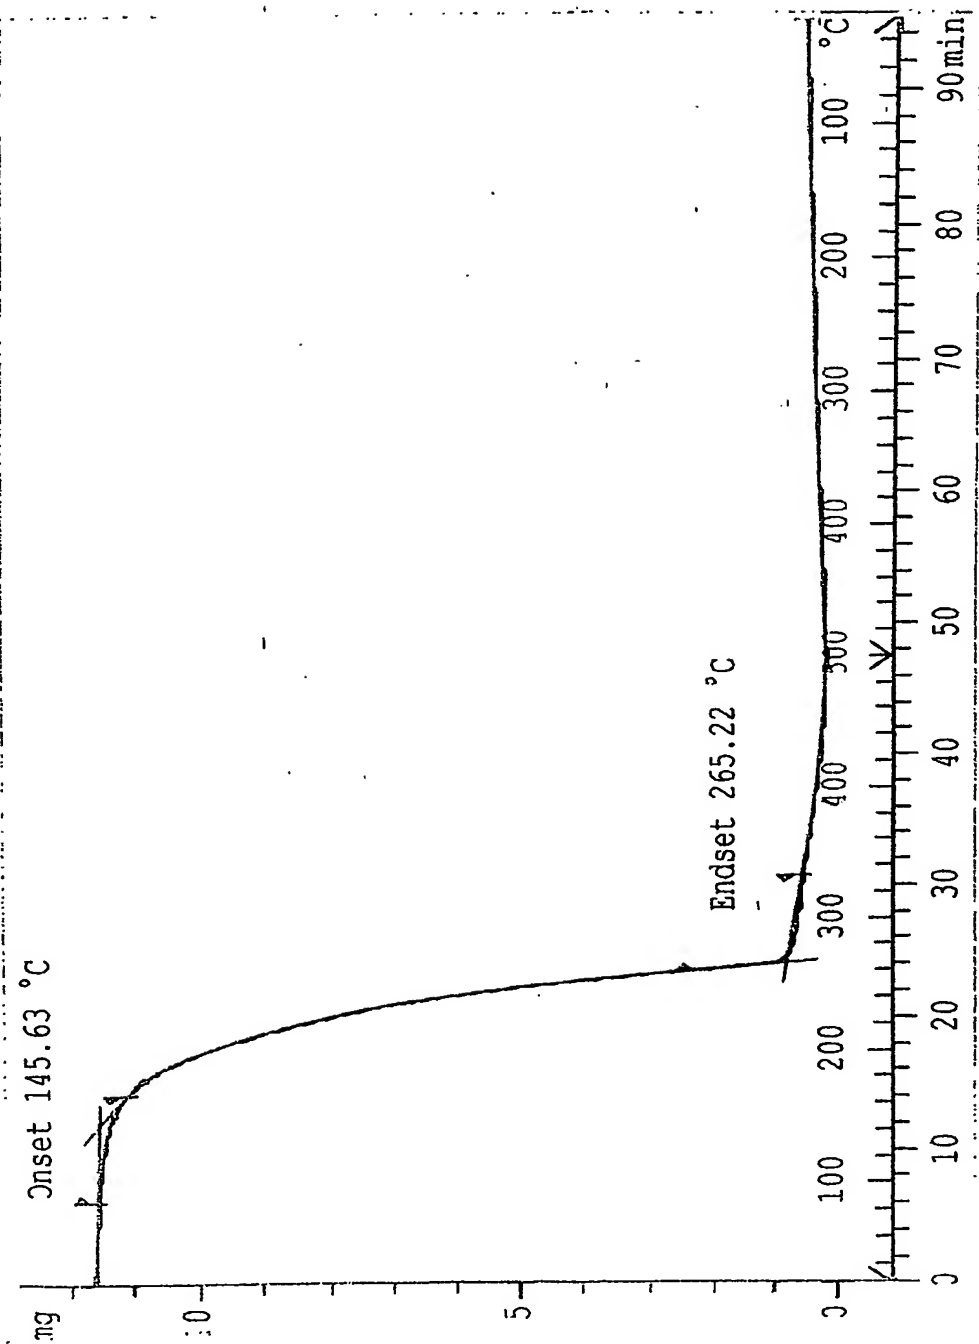

TGA of $(C_2F_7)_2PtC_4H_{10}$

Fig. b

6/14

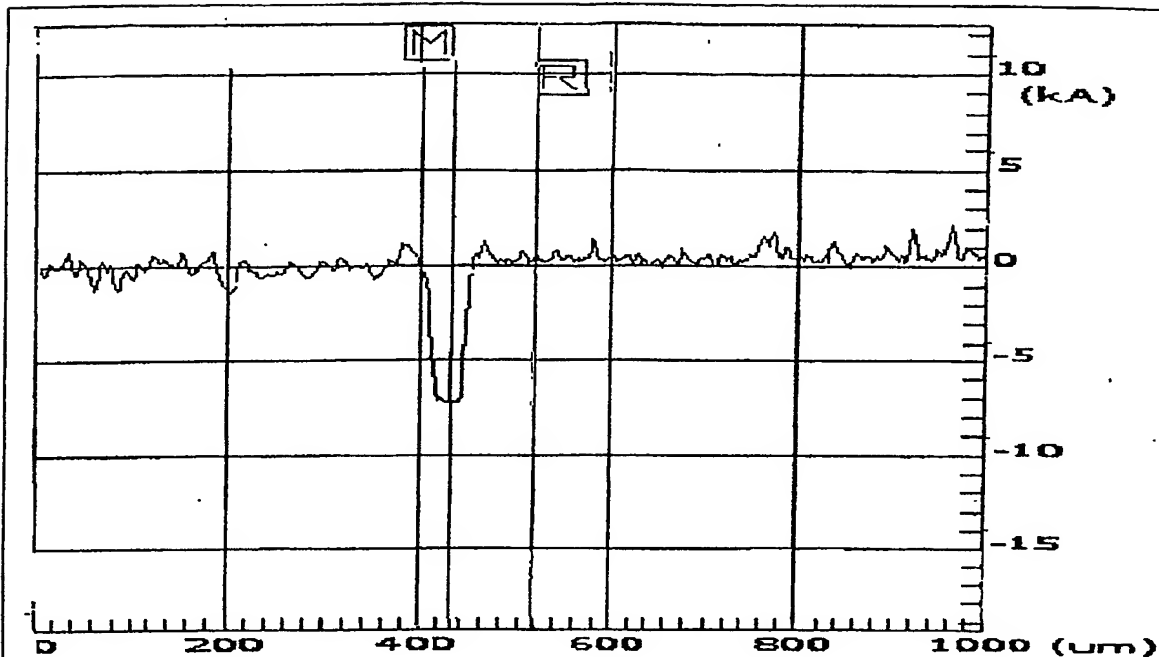

```
DEKTAK 3ST Version 3.00
PROG FILE NAME: <Untitled>
SCAN ROUTINE #: 1
TIME OF SCAN: 03:31:16 Mon Nov 19 2001
DATA FILE NAME: -001
Scan ID..... 0
Scan Length..... 1000um
Scan Speed..... Medium (12 sec)
Data Res..... Low
Data Points..... 500
Resolution..... 2.000 um/sample
Meas. Range..... 65 kA
Profile..... Hills&Valleys
Stylus Force..... 10mg
Soft Touch..... Yes
Ramp-Up Mode..... Off
R. Cursor..... 485A @ 517.52um
M. Cursor..... -7155A @ 431.81um
*Vert. Delta... -7560A
Horiz. Delta... -85.71um
```

Fig. 7

7/14

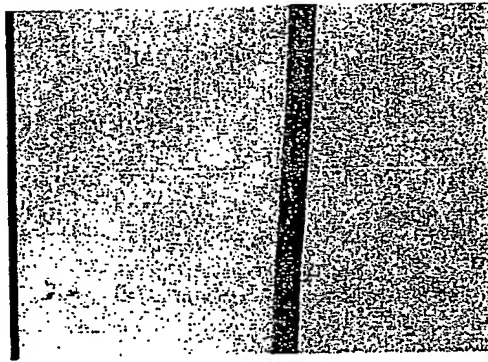


Fig. 8

8/14

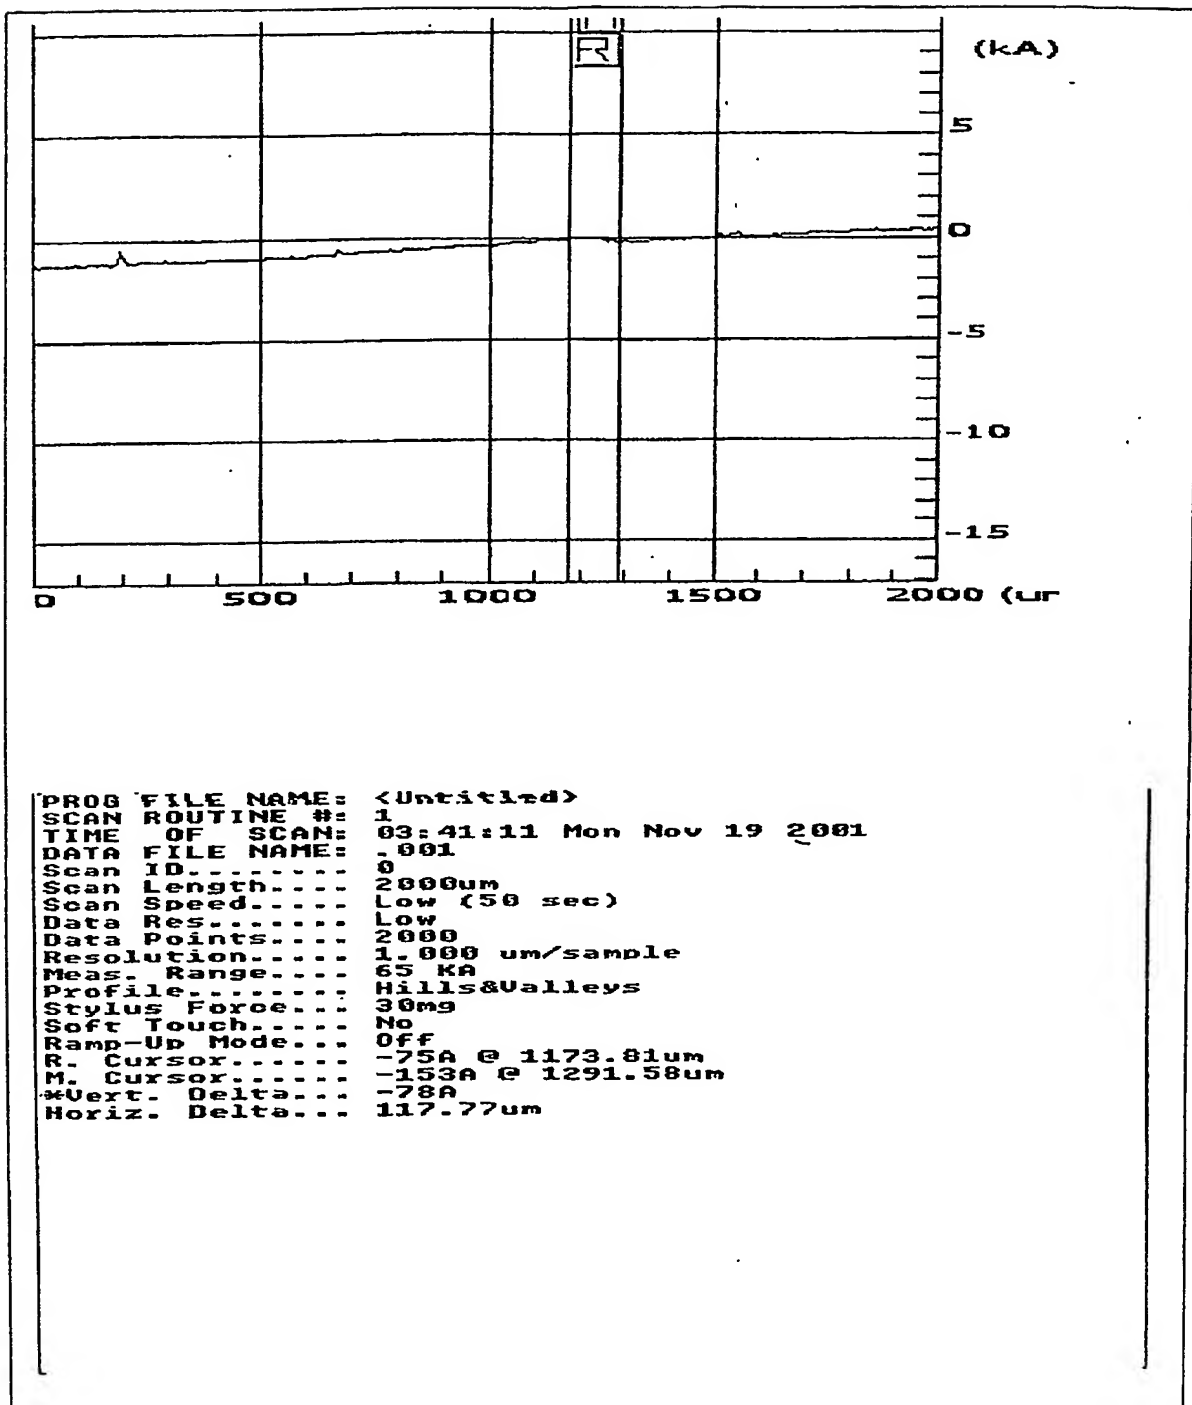


Fig. 9

9/14



Fig.10

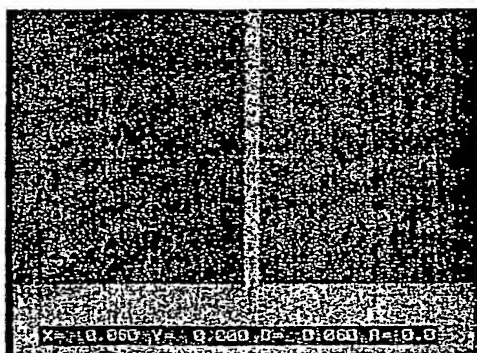


Fig.11

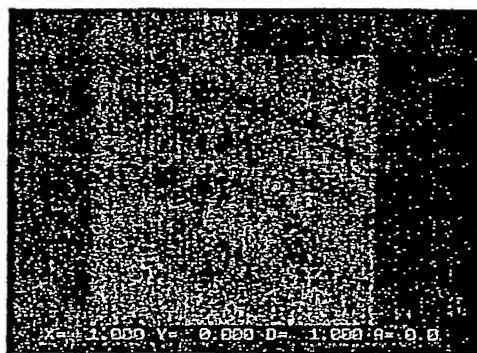


Fig.12

10/14

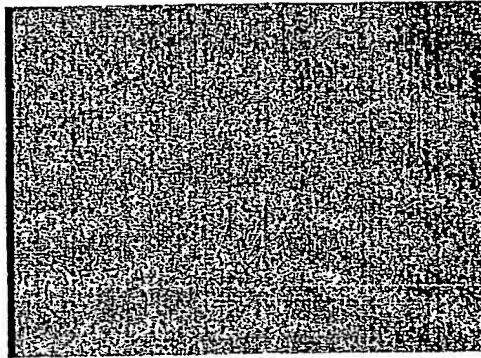


Fig.13

11/14

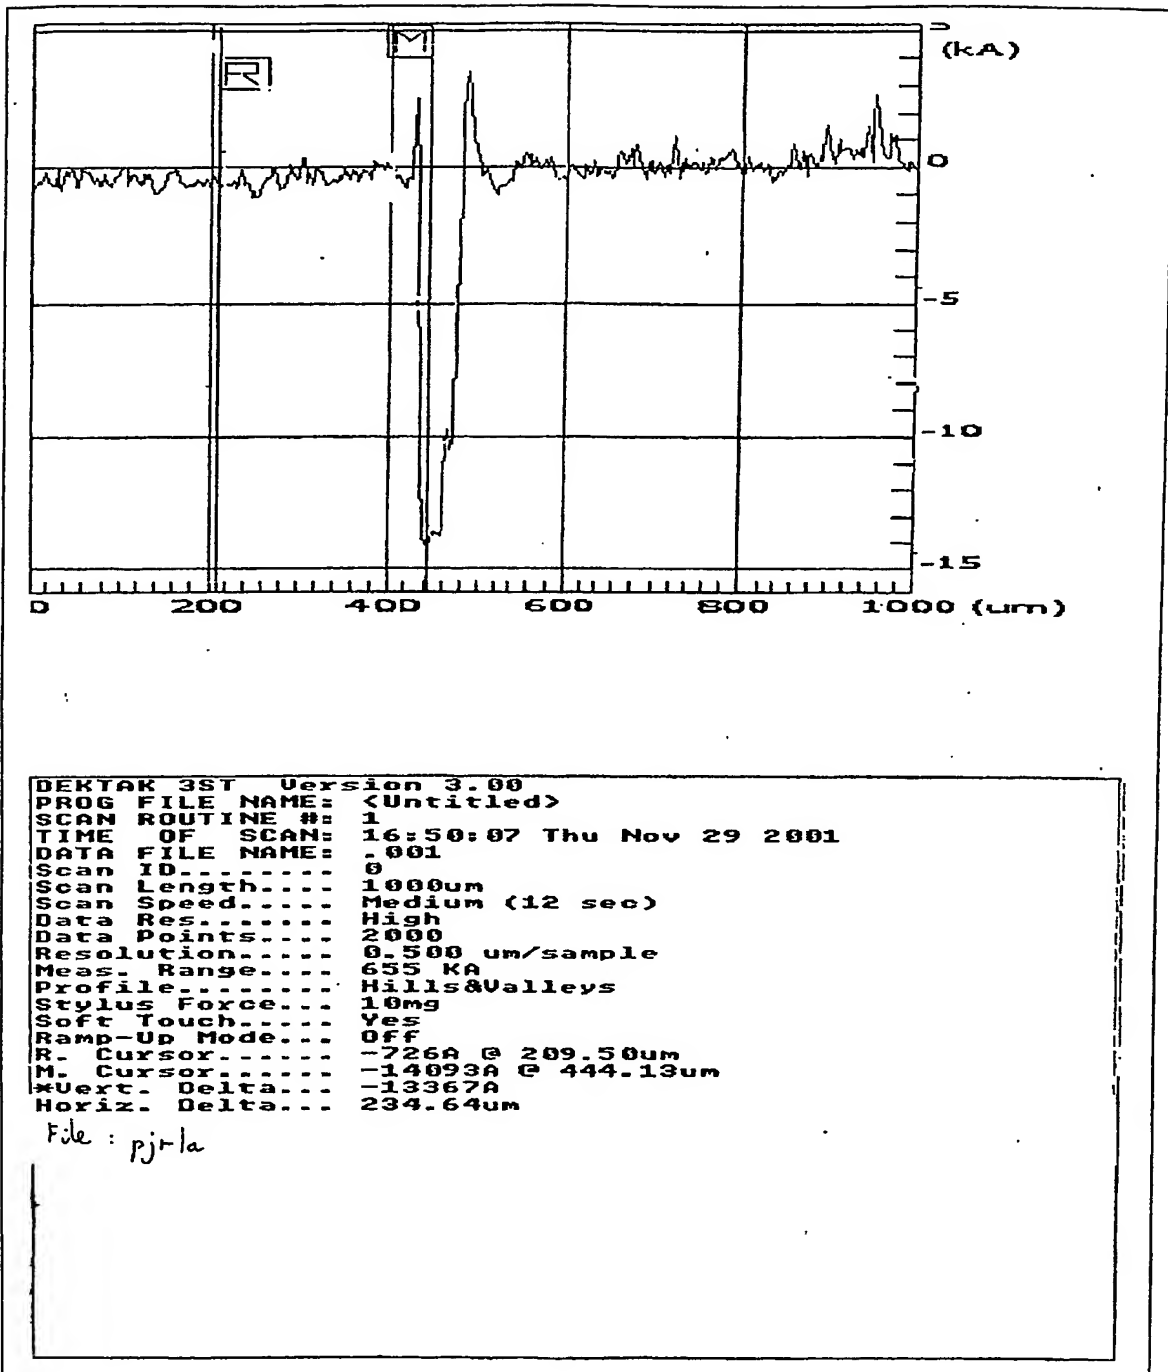


Fig.14

12/14

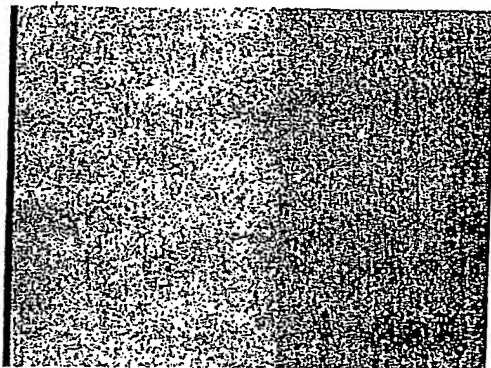


Fig. 15

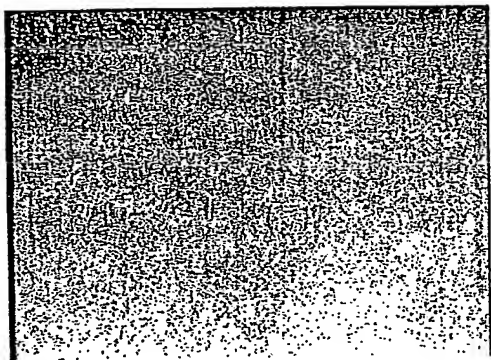


Fig. 16

13/14

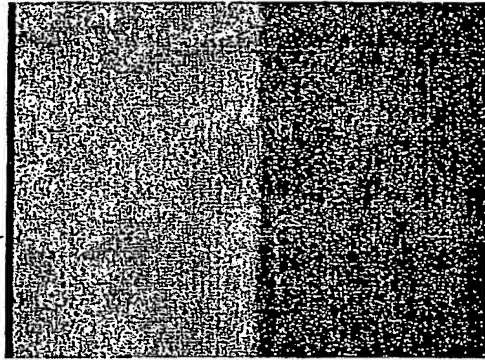


Fig. 17


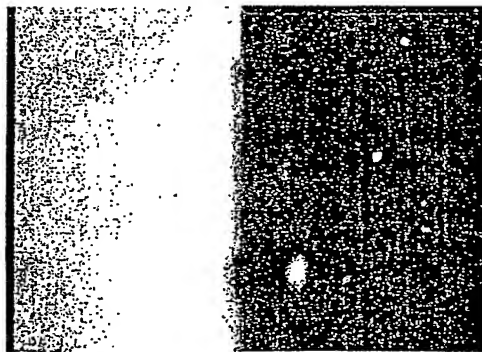


Fig. 18

14/14

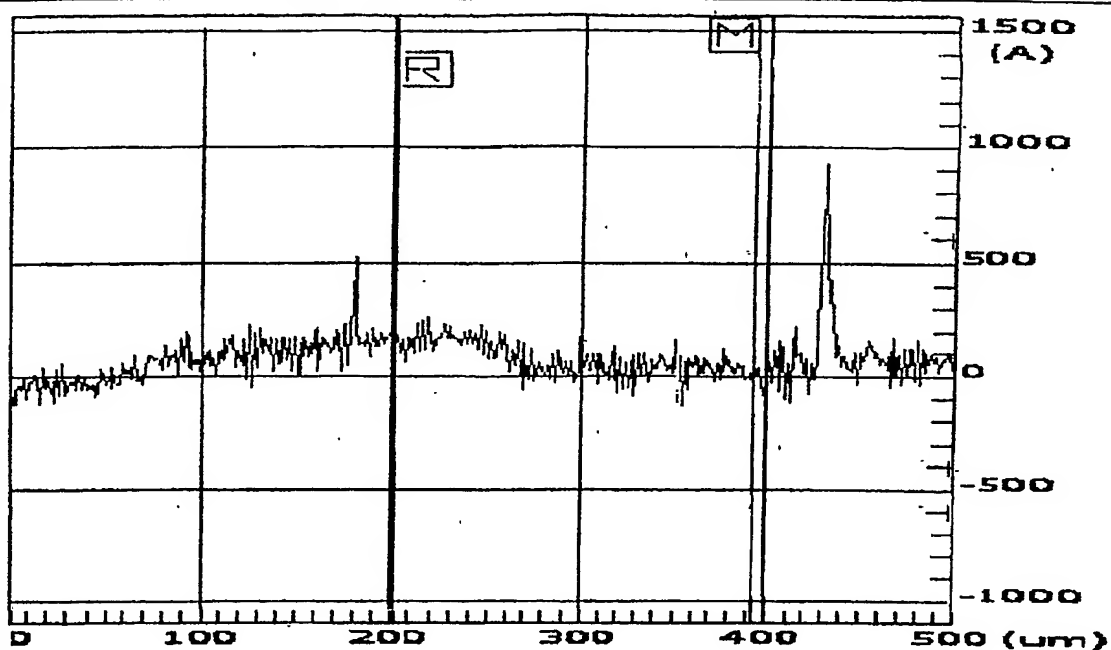

```

DEKTAK 3ST Version 3.00
PROG FILE NAME: <Untitled>
SCAN ROUTINE #: 1
TIME OF SCAN: 09:51:02 Mon Dec 03 2001
DATA FILE NAME: .001
Scan ID..... 0
Scan Length..... 500um
Scan Speed..... Low (50 sec)
Data Res..... High
Data Points..... 8000
Resolution..... 0.063 um/sample
Meas. Range..... 65 KA
Profile..... Hills&Valleys
Stylus Force..... 30mg
Soft Touch..... No
Ramp-Up Mode..... Off
R. Cursor..... 141A @ 201.46um
M. Cursor..... 0A @ 392.71um
*Vert. Delta..... -141A
Horiz. Delta... 191.24um
  
```

Fig. 19

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.